

Features:

- 1200V Schottky Diode
- Zero Reverse Recovery Current
- High Frequency Operation
- Positive Temperature Coefficient
- Temperature independent

Switching



Benefits:

- Unipolar Rectifier
- Minimal switching loss
- Higher Efficiency
- Low cooling requirement

Symbol	Value	Unit
V_{RRM}	1200	V
I_F ($T_C = 137^\circ\text{C}$)	35	A
Q_C	286	nC

Applications:

- Switch Mode Power Supply
- Booster diodes in PFC, DC/DC
- AC/DC converters

Outline

TO-247-2
Circuit

Maximum Ratings

Symbol	Parameter	Value	Unit	Test Conditions
V_R	DC Peak Reverse Voltage	1200	V	$T_J = 25^\circ\text{C}$
V_{RRM}	Repetitive Peak Reverse	1200	V	$T_J = 25^\circ\text{C}$
V_{RSM}	Surge Peak Reverse Voltage	1300	V	$T_J = 25^\circ\text{C}$
I_F	Continuous Forward Current	78	A	$T_C = 25^\circ\text{C}$
		62		$T_C = 75^\circ\text{C}$
		35		$T_C = 137^\circ\text{C}$
I_{FRM}	Repetitive Peak Forward Surge Current	292	A	$T_C = 25^\circ\text{C}$, $T_p = 10\text{ms}$, Half Sine Wave
		158		$T_C = 110^\circ\text{C}$, $T_p = 10\text{ms}$, Half Sine Wave
I_{FSM}	Non-Repetitive Peak Forward Surge Current	338	A	$T_C = 25^\circ\text{C}$, $T_p = 10\text{ms}$, Half Sine Wave
		285		$T_C = 110^\circ\text{C}$, $T_p = 10\text{ms}$, Half Sine Wave
P_D	Power Dissipation	300	W	$T_C = 25^\circ\text{C}$
		100		$T_C = 125^\circ\text{C}$
$T_{J,max}$	Operating Junction Temperature	175	$^\circ\text{C}$	
T_{stg}	Storage Temperature Range	-55 to 175	$^\circ\text{C}$	

Thermal characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit
R_{thJC}	Thermal resistance		0.50		$^{\circ}C/W$

Electrical Characteristics

Symbol	Parameter	Value			Unit	Test Conditions
		Min.	Typ.	Max.		
V_{DC}	DC Blocking Voltage	1200			V	$I_R = 200\mu A, T_J = 25^{\circ}C$
V_F	Forward Voltage		1.45 2.2	1.7 2.5	V	$I_F = 35A, T_J = 25^{\circ}C$ $I_F = 35A, T_J = 175^{\circ}C$
I_R	Reverse Current		10 50	200 1000	μA	$V_R = 1200V, T_J = 25^{\circ}C$ $V_R = 1200V, T_J = 175^{\circ}C$
Q_C	Total Capacitive Charge		286		nC	$I_F = 35A, dI/dt = 550A/\mu s$ $T_J = 25^{\circ}C, V_R = 800V$
C	Total Capacitance		1810 256 201		pF	$V_R = 1V, T_J = 25^{\circ}C, f = 1\text{ MHz}$ $V_R = 400V, T_J = 25^{\circ}C, f = 1\text{ MHz}$ $V_R = 800V, T_J = 25^{\circ}C, f = 1\text{ MHz}$

Typical Performance

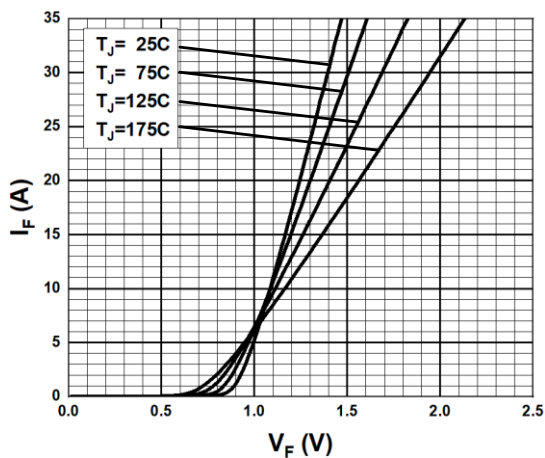


Fig. 1 Forward Characteristics

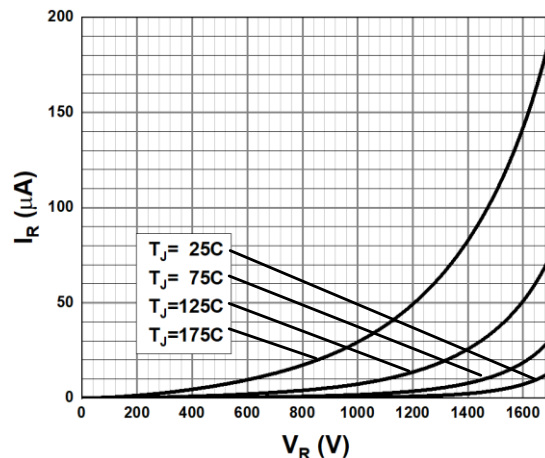


Fig. 2 Reverse Characteristics

Typical Performance

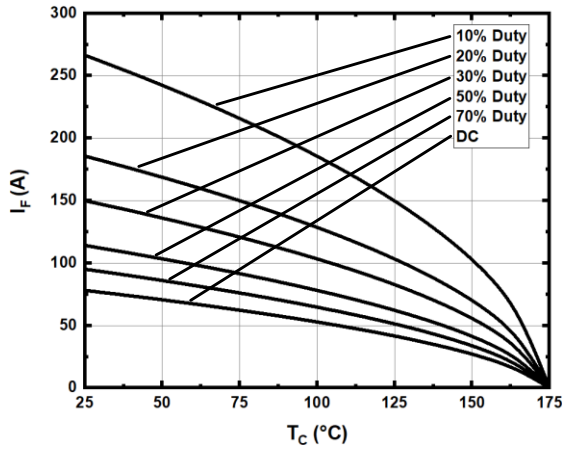


Fig. 3 Current Derating

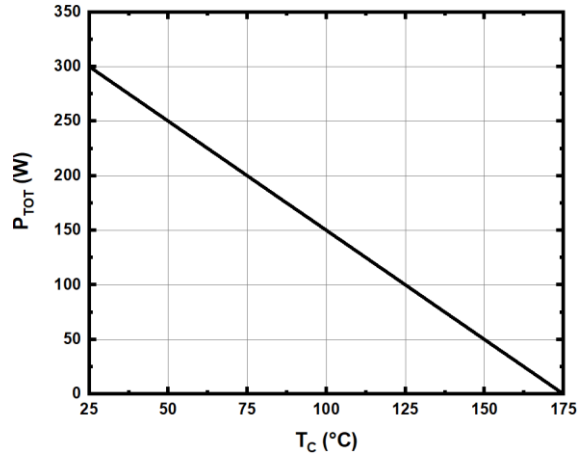


Fig. 4 Power Derating

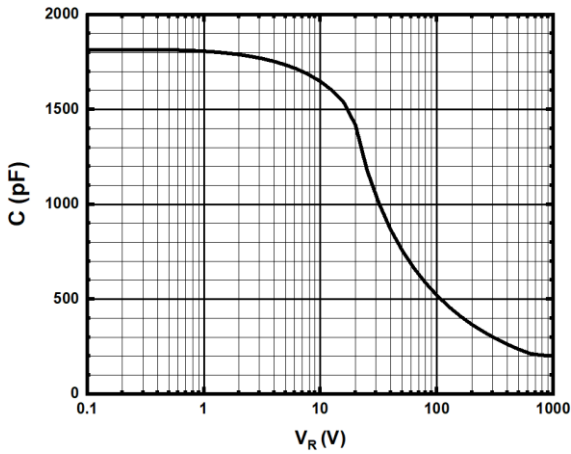


Fig. 5 Capacitance vs. Reverse Voltage

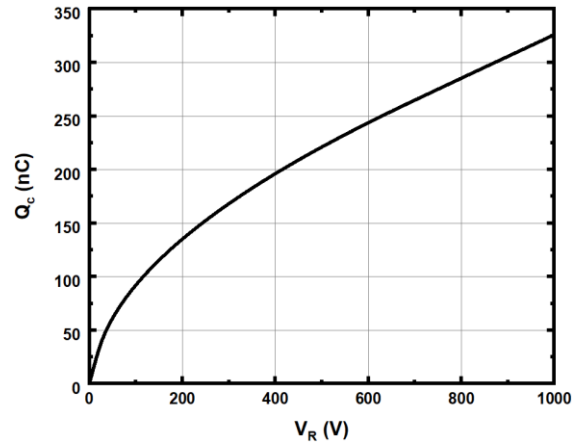


Fig. 6 Recovery Charge vs. Reverse Voltage

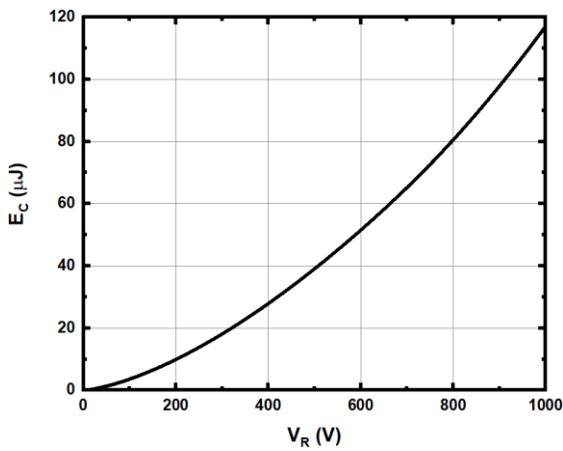


Fig. 7 Capacitance stored Energy


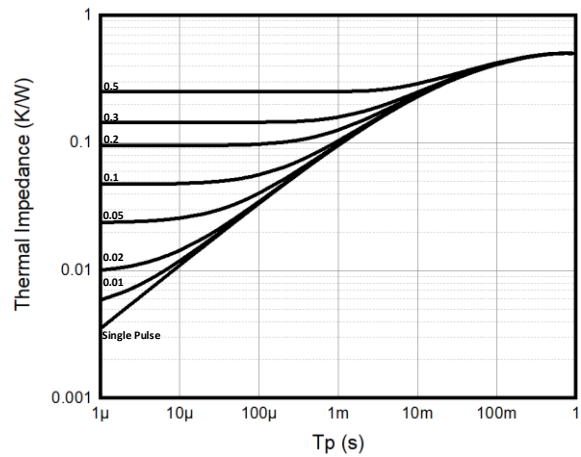


Fig. 8 Transient Thermal Impedance

Package TO-247-2 (Unit: mm)

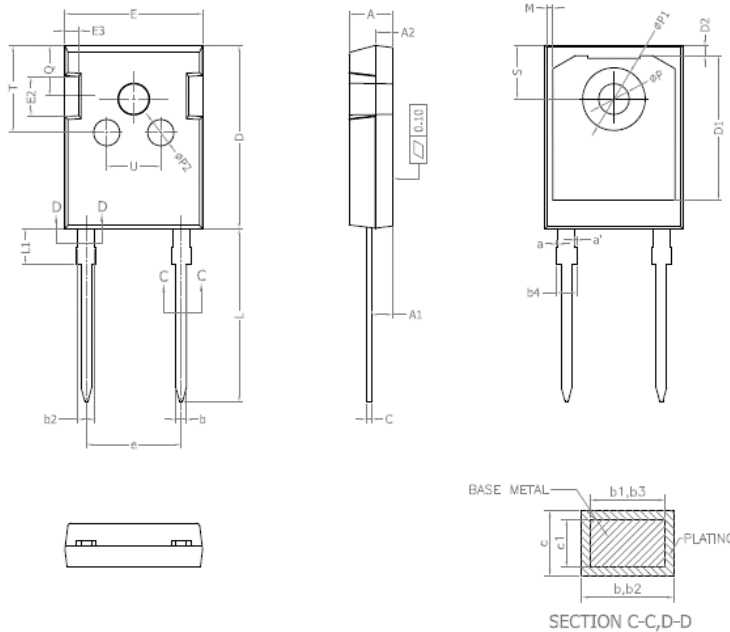

COMMON DIMENSIONS
(UNITS OF MEASURE =MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	4.90	5.00	5.10
A1	2.31	2.41	2.51
A2	1.90	2.00	2.10
a	0	—	0.15
a'	0	—	0.15
b	1.16	—	1.26
b1	1.15	1.2	1.22
b2	1.96	—	2.06
b3	1.95	2.00	2.02
b4	—	—	2.25
c	0.59	—	0.66
c1	0.58	0.60	0.62
D	20.90	21.00	21.10
D1	16.25	16.55	16.85
D2	1.05	1.17	1.35
E	15.70	15.80	15.90
E2	4.40	4.50	4.60
E3	2.40	2.50	2.60
e	—	10.872 BSC	—
L	19.80	19.92	20.10
L1	—	—	4.30
M	0.35	—	0.95
P	3.40	3.50	3.60
P1	7.00	—	7.40
P2	2.40	2.50	2.60
Q	5.60	—	6.00
S	6.05	6.15	6.25
T	9.80	—	10.20
U	6.00	—	6.40

This Product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, systems, or air-traffic control systems.

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, AZ Power Inc. disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.



5601 W SLAUSON AVE 190
CULVER CITY, CA 90230
WWW.AZPE.COM

Information in this document may change without notice. All referenced product or service names and trademarks are the property of their respective owners. Copyright © 2022 AZ Power Inc. All rights reserved.